
ILLUSTRATIVE DATASHEET. Fictional company. Not for production use.

Brass threaded bush

A free-cutting brass bush with an external thread and a small flange. Fast to turn, clean to thread.

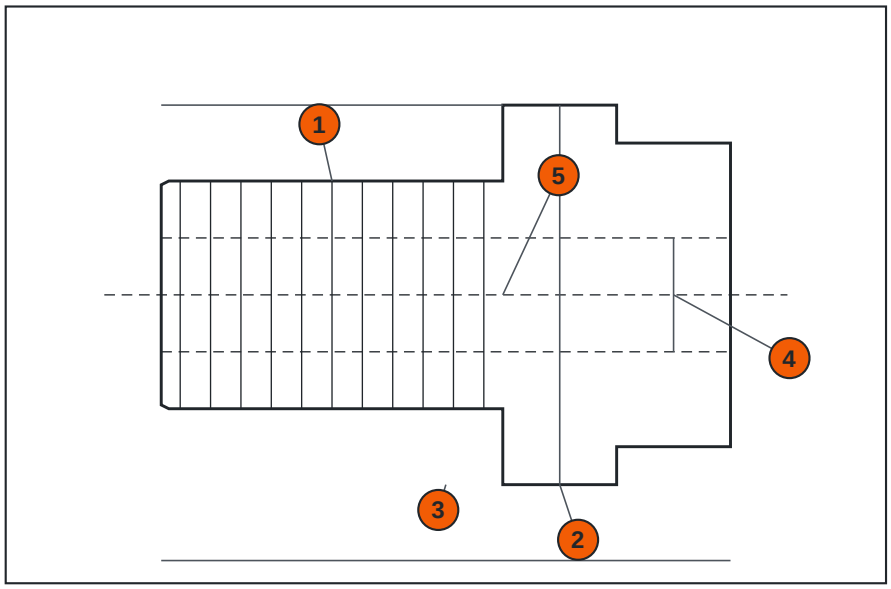

Material
Brass CuZn39Pb3

Process
Turning

Envelope
Diameter 20 × 30 mm

Finish (example)
As turned (example)

Lead time (example)
About 7 working days (example)

Price (example)
From EUR 3.90 per piece at 500 pieces (example)

Specification table

Property	Value	Note
Material	Brass CuZn39Pb3	Illustrative
Envelope	Diameter 20 × 30 mm	Illustrative
General tolerance	±0.1 mm	Unless stated; illustrative
Surface roughness Ra	0.8 µm	Illustrative
Mass	about 0.05 kg	Illustrative

Critical features table (callouts)

No.	Feature	Nominal	Tolerance	Unit	Note
1	Thread	M12 × 1.25	6g	-	length 14 mm
2	Flange diameter	20	-0.05 / -0.10	mm	-
3	Overall length	30	±0.1	mm	-
4	Through bore	6	+0.012 / 0	mm	H7
5	Thread-to-face squareness	0	0.05 max	mm	-

Notes

1. All values are illustrative examples for a fictional company.
2. General tolerance applies unless a feature states its own.
3. This document makes no statement of certification or compliance.
4. Dimensions are in millimetres unless stated.

ILLUSTRATIVE DATASHEET. Fictional company. Not for production use.